



# Super Cool Air Conditioners



Don't trust  
anybody who  
doesn't have  
a sense of  
humour!  
— MICKELANDER



**NWAC12C**

**SPECIFICATION**

Capacity	: 1.0 Ton
BTU	: 12000
Climatic Condition	: T1
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 1540W
Max. Current	: 6.7
Compressor Type	: Rotary
Compressor Capacity	: 3380W
Compressor Brand	: GMCC

**PACKING DETAILS**

Net Weight	: 38.00 KG
Gross Weight	: 45.00 KG
Packaging Dimension	: 740 x 512 x 770 MM
Loading Capacity 20ft & 40hq	: 95/235



6 2 9 1 1 0 1 6 9 4 6 5 4

WINDOW AC



**NWAC18C**

**SPECIFICATION**

Capacity	: 1.5 Ton
BTU	: 18000
Max Power Input	: 2925W
Rated Power Input	: 2240W
Max Current	: 13.00A
Refrigerant	: R410/ 610g
Compressor Type	: Rotary
Air Flow (Hi/Mi/Lo)	: 710/625/540 m3/h
Indoor Noise Level	: 55 dB(A)
Voltage	: 220-240V~/50Hz

**PACKING DETAILS**

Net Weight	: 53 KG
Gross Weight	: 57 KG
Product Dimension	: 660 x 680 x 430 MM
Packaging Dimension	: 740 x 795 x 468 MM
Loading Capacity 40hq	: 220 Pcs



**55 dB(A)**  
Noise Level



**710 m3/h (Hi)**  
Air Flow Volume



**Rotary**  
Compressor



**Refrigerant**



6 2 9 1 1 0 1 6 9 0 0 9 0



**NWAC24C**

**SPECIFICATION**

Capacity	: 2 Ton
BTU	: 24000
Max Power Input	: 3517W
Rated Power Input	: 2429W
Max Current	: 14.00A
Refrigerant	: R410/ 900g
Compressor Type	: Rotary
Air Flow (Hi/Mi/Lo)	: 700/615/535 m3/h
Indoor Noise Level	: 56 dB(A)
Voltage	: 220-240V~/50Hz

**PACKING DETAILS**

Net Weight	: 56 KG
Gross Weight	: 60 KG
Product Dimension	: 660 x 680 x 430 MM
Packaging Dimension	: 740 x 795 x 468 MM
Loading Capacity 40hq	: 220 pcs



**56 dB(A)**  
Noise Level



**700 m3/h (Hi)**  
Air Flow Volume



**Rotary**  
Compressor



**Refrigerant**



6 2 9 1 1 0 1 6 9 2 2 9 2

SPLIT AC



With Pipe



**SPECIFICATION**

Type	: Cool
Capacity	: 9000 BTU
Climatic Condition	: T1
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 1180W
Max. Current	: 6.5
Compressor Type	: Rotary
Material Type	: Copper



**PACKING DETAILS**

Net Weight (Indoor Unit)	: 7.00 KG	Packaging Dimension (Indoor Unit)	: 800 x 265 x 330 MM
Net Weight (Outdoor Unit)	: 21.00 KG	Packaging Dimension (Outdoor Unit)	: 755 x 515 x 325 MM
Gross Weight (Indoor Unit)	: 8.00 KG	Loading Capacity 20ft & 40hq	: 140/340
Gross Weight (Outdoor Unit)	: 24.00 KG		



With Pipe



**SPECIFICATION**

Type	: Cool
Capacity	: 1 Ton
BTU	: 12000
Climatic Condition	: T1
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 1560W
Max. Current	: 9.1
Compressor Type	: Rotary
Material Type	: Copper



**PACKING DETAILS**

Net Weight (Indoor Unit)	: 14.50 KG	Packaging Dimension (Indoor Unit)	: 1208 x 393 x 313 MM
Net Weight (Outdoor Unit)	: 42.00 KG	Packaging Dimension (Outdoor Unit)	: 995 x 415 x 690 MM
Gross Weight (Indoor Unit)	: 18.00 KG	Loading Capacity 20ft & 40hq	: 134/320
Gross Weight (Outdoor Unit)	: 49.00 KG		



**SPECIFICATION**

Type	: Hot & Cool
BTU	: 9000
Climatic Condition	: T1
Rated Volt & Frequency	: 220-240V/50HZ/1P
Max. Input Constumption	: 1165/1094
Max. Current	: 6.3/5.68
Compressor Type	: Rotary



**PACKING DETAILS**

Net Weight (Indoor Unit)	: 7.00 KG
Net Weight (Outdoor Unit)	: 22.50 KG
Gross Weight (Indoor Unit)	: 9.80 KG
Gross Weight (Outdoor Unit)	: 26.00 KG
Packaging Dimension (Indoor Unit)	: 810 × 322 × 267 MM
Packaging Dimension (Outdoor Unit)	: 705 × 320 × 565 MM
Loading Capacity 20ft & 40hq	: 146/352

SPLIT AC



**SPECIFICATION**

Type	: Hot & Cool
Capacity	: 1.0 Ton
BTU	: 12000
Climatic Condition	: T1
Rated Volt & Frequency	: 220-240V/50HZ/1P
Max. Input Constumption	: 1165/1094
Max. Current	: 8.73/9.2
Compressor Type	: Rotary



**PACKING DETAILS**

Net Weight (Indoor Unit)	: 8.00 KG
Net Weight (Outdoor Unit)	: 26.50 KG
Gross Weight (Indoor Unit)	: 10.00 KG
Gross Weight (Outdoor Unit)	: 31.00 KG
Packaging Dimension (Indoor Unit)	: 860 × 322 × 267 MM
Packaging Dimension (Outdoor Unit)	: 811 × 361 × 600MM
Loading Capacity 20ft & 40hq	: 114/257



**SPECIFICATION**

Type	: Hot & Cool
Capacity	: 1.5 Ton
BTU	: 18000
Climatic Condition	: T1
Rated Volt & Frequency	: 220-240V/50HZ/1P
Max. Input Constumption	: 2593/1598
Max. Current	: 13.65/10.3
Compressor Type	: Rotary



**PACKING DETAILS**

Net Weight (Indoor Unit)	: 9.50 KG
Net Weight (Outdoor Unit)	: 33.00 KG
Gross Weight (Indoor Unit)	: 12.50 KG
Gross Weight (Outdoor Unit)	: 37.00 KG
Packaging Dimension (Indoor Unit)	: 974 × 361 × 277 MM
Packaging Dimension (Outdoor Unit)	: 873 × 361 × 600 MM
Loading Capacity 20ft & 40hq	: 98/233



**NSAC24KHC22**



**PACKING DETAILS**

Net Weight (Indoor Unit) : 10.00 KG  
 Net Weight (Outdoor Unit) : 48.00 KG  
 Gross Weight (Indoor Unit) : 13.50 KG  
 Gross Weight (Outdoor Unit) : 52.00 KG  
 Packaging Dimension (Indoor Unit) : 974 x 361 x 277MM  
 Packaging Dimension (Outdoor Unit) : 1022 x 431 x 747 MM  
 Loading Capacity 20ft & 40hq : 67/152

**SPECIFICATION**

Type : Hot & Cool  
 BTU : 24000  
 Climatic Condition : T1  
 Rated Volt & Frequency : 230V/50HZ/1P  
 Max. Input Constumption : 3250  
 Max. Current : 14.95/12.87  
 Compressor Type : Rotary



**NSAC12CR**



**PACKING DETAILS**

Net Weight (Indoor Unit) : 9.00 KG  
 Net Weight (Outdoor Unit) : 32.00 KG  
 Gross Weight (Indoor Unit) : 11.00 KG  
 Gross Weight (Outdoor Unit) : 36.00 KG  
 Packaging Dimension (Indoor Unit) : 835 x 300 x 278 MM  
 Packaging Dimension (Outdoor Unit) : 920 x 595 x 335 MM  
 Loading Capacity 20ft & 40hq : 140/335

**SPECIFICATION**

Type : Cool  
 Capacity : 1.0 Ton  
 BTU : 12000  
 Climatic Condition : T3  
 Rated Volt & Frequency : 220-240V/50Hz  
 Max. Input Constumption : 1310W  
 Max. Current : 5.2/6.3  
 Compressor Type : Rotary  
 Material Type : Copper & Aluminum Fin



**NSAC18CR**



**PACKING DETAILS**

Net Weight (Indoor Unit) : 13.00 KG  
 Net Weight (Outdoor Unit) : 40.00 KG  
 Gross Weight (Indoor Unit) : 15.00 KG  
 Gross Weight (Outdoor Unit) : 45.00 KG  
 Packaging Dimension (Indoor Unit) : 990 x 377 x 318 MM  
 Packaging Dimension (Outdoor Unit) : 995 x 415 x 690 MM  
 Loading Capacity 20ft & 40hq : 72/174

**SPECIFICATION**

Type : Cool  
 Capacity : 1.5 Ton  
 BTU : 18000  
 Climatic Condition : T3  
 Rated Volt & Frequency : 220-240V/50Hz  
 Max. Input Constumption : 2500W  
 Max. Current : 13.4  
 Compressor Type : Rotary  
 Material Type : Copper & Aluminum Fin



6 2 9 1 1 0 1 6 9 7 1 2 9

### SPECIFICATION

Type	: Cool
Capacity	: 2.0 Ton
BTU	: 24000
Climatic Condition	: T3
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 3000W
Max. Current	: 15.9
Compressor Type	: Rotary
Material Type	: Copper

### PACKING DETAILS

Net Weight (Indoor Unit)	: 14.50 KG
Net Weight (Outdoor Unit)	: 42.00 KG
Gross Weight (Indoor Unit)	: 18.00 KG
Gross Weight (Outdoor Unit)	: 49.00 KG

Packaging Dimension (Indoor Unit)	: 1208 x 393 x 313 MM
Packaging Dimension (Outdoor Unit)	: 995 x 415 x 690 MM
Loading Capacity 20ft & 40hq	: 63/155

SPLIT AC



6 2 9 1 1 0 1 6 9 2 0 0 1

### SPECIFICATION

Type	: Cool
Capacity	: 2.5 Ton
BTU	: 30000
Climatic Condition	: T3
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 3500W
Max. Current	: 16
Compressor Type	: Rotary
Material Type	: Copper

### PACKING DETAILS

Net Weight (Indoor Unit)	: 16.00 KG
Net Weight (Outdoor Unit)	: 53 KG
Gross Weight (Indoor Unit)	: 20.00 KG
Gross Weight (Outdoor Unit)	: 64 KG

Packaging Dimension (Indoor Unit)	: 1275 x 392 x 315 MM
Packaging Dimension (Outdoor Unit)	: 990 x 410 x 780 MM
Loading Capacity 20ft & 40hq	: 60/147



6 2 9 1 1 0 1 6 9 5 2 4 8

### SPECIFICATION

Type	: Cool
Capacity	: 3.0 Ton
BTU	: 36000
Climatic Condition	: T3
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 4050W
Max. Current	: 21.8
Compressor Type	: Rotary
Material Type	: Copper & Aluminum Fin

### PACKING DETAILS

Net Weight (Indoor Unit)	: 18.00 KG
Net Weight (Outdoor Unit)	: 73.00 KG
Gross Weight (Indoor Unit)	: 25.00 KG
Gross Weight (Outdoor Unit)	: 82.00 KG

Packaging Dimension (Indoor Unit)	: 1515 x 428 x 345 MM
Packaging Dimension (Outdoor Unit)	: 1120 x 485 x 890 MM
Loading Capacity 20ft & 40hq	: 40/100



### SPECIFICATION

Type	: Cool
Refrigerant	: R410a
Capacity	: 1.5 Ton
BTU	: 18000
Climatic Condition	: T3
Rated Volt & Frequency	: 230V/50HZ/1P
Compressor Type	: Rotary

### PACKING DETAILS

Net Weight (Indoor Unit)	: 12 KG
Net Weight (Outdoor Unit)	: 36 KG

Packaging Dimension (Indoor Unit)	: 950 × 380 × 290 MM
Packaging Dimension (Outdoor Unit)	: 920 × 620 × 400 MM
Loading Capacity 40hq	: 185



### SPECIFICATION

Type	: Cool
Refrigerant	: R410a
Capacity	: 2.0 Ton
BTU	: 24000
Climatic Condition	: T3
Rated Volt & Frequency	: 230V/50HZ/1P
Compressor Type	: Rotary

### PACKING DETAILS

Net Weight (Indoor Unit)	: 14.5 KG
Net Weight (Outdoor Unit)	: 42 KG

Packaging Dimension (Indoor Unit)	: 1130 × 395 × 300 MM
Packaging Dimension (Outdoor Unit)	: 945 × 725 × 435 MM
Loading Capacity 40hq	: 155



6 2 9 1 1 0 1 6 9 1 9 7 4

### SPECIFICATION

Type	: Cool
Capacity	: 1.0 Ton
BTU	: 18000
Climatic Condition	: T3
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 1860W
Max. Current	: 8.8
Compressor Type	: Piston
Material Type	: Copper

### PACKING DETAILS

Net Weight (Indoor Unit)	: 13.00 KG
Net Weight (Outdoor Unit)	: 50 KG
Gross Weight (Indoor Unit)	: 15.00 KG
Gross Weight (Outdoor Unit)	: 53 KG

Packaging Dimension (Indoor Unit)	: 983 x 377 x 318 MM
Packaging Dimension (Outdoor Unit)	: 995 x 415 x 690 MM
Loading Capacity 20ft & 40hq	: 72/174

SPLIT AC



6 2 9 1 1 0 1 6 9 1 9 7 4

### SPECIFICATION

Type	: Cool
Capacity	: 2.0 Ton
BTU	: 24000
Climatic Condition	: T3
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 2380W
Max. Current	: 12.2
Compressor Type	: Piston
Material Type	: Copper

### PACKING DETAILS

Net Weight (Indoor Unit)	: 14.50 KG
Net Weight (Outdoor Unit)	: 53.00 KG
Gross Weight (Indoor Unit)	: 18.00 KG
Gross Weight (Outdoor Unit)	: 60.00 KG

Packaging Dimension (Indoor Unit)	: 1208 x 393 x 313 MM
Packaging Dimension (Outdoor Unit)	: 990 x 410 x 780 MM
Loading Capacity 20ft & 40hq	: 63/155



6 2 9 1 1 0 1 6 9 9 0 4 8


### SPECIFICATION

Type	: Cool
Capacity	: 2.5 Ton
BTU	: 30000
Climatic Condition	: T3
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 3500W
Max. Current	: 16
Compressor Type	: Piston
Material Type	: Copper

### PACKING DETAILS

Net Weight (Indoor Unit)	: 16.00 KG
Net Weight (Outdoor Unit)	: 58 KG
Gross Weight (Indoor Unit)	: 20.00 KG
Gross Weight (Outdoor Unit)	: 64 KG

Packaging Dimension (Indoor Unit)	: 1275 x 392 x 315 MM
Packaging Dimension (Outdoor Unit)	: 990 x 410 x 780 MM
Loading Capacity 20ft & 40hq	: 50/119

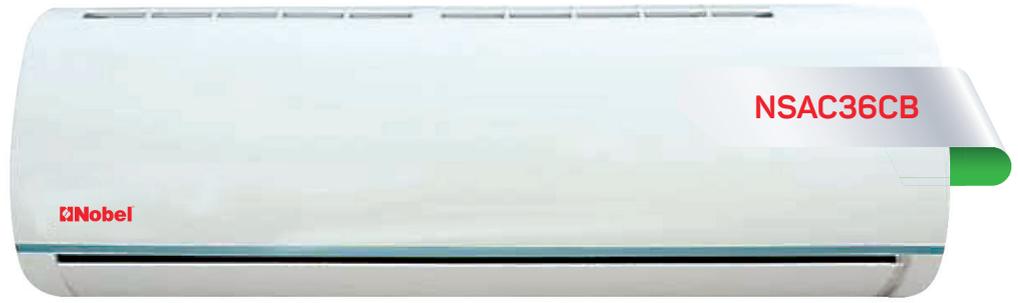

**SPECIFICATION**


Type	: Cool
Capacity	: 3.0 Ton
BTU	: 36000
Climatic Condition	: T3
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Constumption	: 4050W
Max. Current	: 21.8
Compressor Type	: Piston
Material Type	: Copper

**PACKING DETAILS**

Net Weight (Indoor Unit)	: 19 KG	Packaging Dimension (Indoor Unit)	: 1515 x 428 x 345 MM
Net Weight (Outdoor Unit)	: 73 KG	Packaging Dimension (Outdoor Unit)	: 1120 x 485 x 890 MM
Gross Weight (Indoor Unit)	: 23 KG	Loading Capacity 20ft & 40hq	: 44/106
Gross Weight (Outdoor Unit)	: 82 KG		

**SPECIFICATION**

Type	: Heat & Cool
Capacity	: 3.0
BTU	: 36,000
Climatic Condition	: T3
Max. Input Constumption	: 5100W
Max. Current	: 27
Compressor Type	: Scroll



**PACKING DETAILS**

Net Weight (Indoor/Outdoor)	: 53/67
Packaging Dimension (Indoor Unit)	: 690 x 2100 x 565 MM
Packaging Dimension (Outdoor Unit)	: 1105 x 890 x 495 MM
Loading Capacity 20ft	: 20/40



**NFA50G4**

**SPECIFICATION**

Type	: Heat & Cool
BTU	: 48000
Climatic Condition	: T3
Refrigerant	: R410A
Max. Input Power	: 7000 W
Max. Current	: 15
Power	: 380-410V-3N-/50H
EER Cooling	: 2.54W/W
COP Heating	: 2.78W/W




**PACKING DETAILS**

Net Weight (Indoor Unit)	: 54 KG
Net Weight (Outdoor Unit)	: 101 KG
Net Dimension (Indoor Unit)	: 580 x 400 x 1925 MM
Net Dimension (Outdoor Unit)	: 950 x 340 x 1260 MM
Packaging Dimension (Indoor Unit)	: 690 x 565 x 2100 MM
Packaging Dimension (Outdoor Unit)	: 1100 x 430 x 1370 MM
Loading Capacity 40hq	: 40



**NFA60G4**

Type	: Heat & Cool
BTU	: 60000
Climatic Condition	: T3
Max. Input Power	: 7400W
Max. Current	: 15.5
Power	: 380-415V-3-50Hz
Air Flow Volume	: 1900m3/h
Noise level	: 57dB (A)
Max. Suction Pressure	: 1.15Mpa



**PACKING DETAILS**

Net Weight (Indoor Unit)	: 54 KG
Net Weight (Outdoor Unit)	: 102 KG
Net Dimension (Indoor Unit)	: 580 x 1925 x 400 MM
Net Dimension (Outdoor Unit)	: 940 x 1320 x 340 MM
Packaging Dimension (Indoor Unit)	: 690 x 2100 x 565 MM
Packaging Dimension (Outdoor Unit)	: 1100 x 1370 x 430 MM
Loading Capacity 40hq	: 42





**PACKING DETAILS**

Net Weight (Indoor Unit) : 14 KG  
 Net Weight (Outdoor Unit) : 54 KG  
 Net Dimension (Indoor Unit) : 970 x 315 x 235 MM  
 Net Dimension (Outdoor Unit): 825 x 655 x 310 MM

**SPECIFICATION**

Type : Cool  
 Refrigerant : R22  
 Capacity : 1.5 Ton  
 BTU : 18000  
 Climatic Condition : T1/T3  
 Rated Volt & Frequency : 220-240V/50Hz  
 Max. Input Power : 2600W  
 Air Flow Volume : 1000 m3/h  
 Noise level : 47 dB (A)

Packaging Dimension (Indoor Unit) : 1025 x 385 x 305 MM  
 Packaging Dimension (Outdoor Unit) : 945 x 435 x 725 MM  
 Loading Capacity 40hq : 165



6 2 9 1 1 0 1 6 9 1 5 6 1



**PACKING DETAILS**

Net Weight (Indoor Unit) : 15KG  
 Net Weight (Outdoor Unit) : 55 KG  
 Net Dimension (Indoor Unit) : 1100 x 330 x 235 MM  
 Net Dimension (Outdoor Unit): 825 x 655 x 310 MM


**SPECIFICATION**

Type : Cool  
 Refrigerant : R22  
 Capacity : 2 Ton  
 BTU : 24000  
 Climatic Condition : T1/T3  
 Rated Volt & Frequency : 220-240V/50Hz  
 Max. Input Power : 3380W  
 Air Flow Volume : 1250 m3/h  
 Noise level : 59 dB (A)

Packaging Dimension (Indoor Unit) : 1160 x 400 x 305 MM  
 Packaging Dimension (Outdoor Unit) : 945 x 435 x 725 MM  
 Loading Capacity 40hq : 150



6 2 9 1 1 0 1 6 9 1 5 7 8

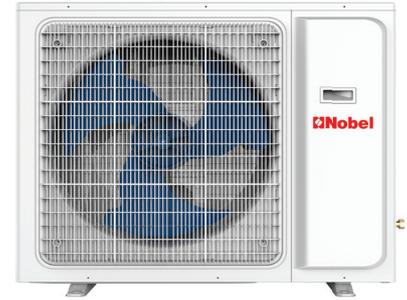

### SPECIFICATION

Type	: Cooling
Capacity	: 2.5 Ton
BTU	: 30000
Refrigerant	: R22
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Power	: 4300W
Max. Input Current	: 21.5A
Air Flow Volume	: 1600 m3/h
Noise level	: 52dB (A)



### PACKING DETAILS

Net Weight (Indoor Unit)	: 16 KG
Net Weight (Outdoor Unit)	: 69 KG
Net Dimension (Indoor Unit)	: 1250 x 360 x 253 MM
Net Dimension (Outdoor Unit)	: 970x 370 x 805MM

Packaging Dimension (Indoor Unit)	: 1340 x 445 x 355 MM
Packaging Dimension (Outdoor Unit)	: 1105 x 495 x 890 MM
Loading Capacity 40hq	: 100



6 2 9 1 1 0 1 6 9 2 4 0 7



### SPECIFICATION

Type	: Cooling
Capacity	: 3 Ton
BTU	: 36000
Refrigerant	: R22
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Power	: 4750W
Max. Input Current	: 21.5A
Air Flow Volume	: 1600 m3/h
Noise level	: 60dB (A)



### PACKING DETAILS

Net Weight (Indoor Unit)	: 16 KG
Net Weight (Outdoor Unit)	: 71 KG
Net Dimension (Indoor Unit)	: 1250 x 360 x 253 MM
Net Dimension (Outdoor Unit)	: 970 x 370 x 805 MM

Packaging Dimension (Indoor Unit)	: 1340 x 445 x 355 MM
Packaging Dimension (Outdoor Unit)	: 1105 x 495 x 890 MM
Loading Capacity 40hq	: 100



6 2 9 1 1 0 1 6 9 2 4 1 4



**PACKING DETAILS**

Net Weight (Indoor Unit) : 6.5 KG  
 Net Weight (Outdoor Unit) : 23 KG  
 Gross Weight (Indoor Unit) : 8.5 KG  
 Gross Weight (Outdoor Unit) : 27 KG

Packaging Dimension (Indoor Unit) : 765 × 325 × 256 MM  
 Packaging Dimension (Outdoor Unit) : 700 × 545 × 315 MM  
 Loading Capacity 40hq : 360



**SPECIFICATION**

Type : Cooling & Heating  
 Capacity : 0.75 Ton  
 BTU : 9000  
 Refrigerant : R410A  
 Rated Volt & Frequency : 220-240V/50Hz  
 Rated Input-Cooling : 820  
 Rated Input-Heating : 810  
 Rated cooling current : 3.8  
 Rated heating current : 3.6  
 Indoor noise level : 33 dB(A)



**PACKING DETAILS**

Net Weight (Indoor Unit) : 7 KG  
 Net Weight (Outdoor Unit) : 9 KG  
 Gross Weight (Indoor Unit) : 27 KG  
 Gross Weight (Outdoor Unit) : 33 KG

Packaging Dimension (Indoor Unit) : 840 × 316 × 260 MM  
 Packaging Dimension (Outdoor Unit) : 800 × 575 × 355 MM  
 Loading Capacity 40hq : 270



**SPECIFICATION**

Type : Cooling  
 Capacity : 1 Ton  
 BTU : 12000  
 Refrigerant : R22  
 Rated Volt & Frequency : 220-240V/50Hz  
 Rated Input-Cooling : 1178  
 Indoor air circulation : 550 m3/h  
 Rated cooling current : 5.9  
 Indoor fan type : Cross Flow



SPLIT AC

**SPECIFICATION**

Type	: Cooling & Heating
Capacity	: 1.5 Ton
BTU	: 18000
Refrigerant	: R410A
Rated Volt & Frequency	: 220-240V/50Hz
Rated Input-Cooling	: 1730W
Rated Input-Heating	: 1685W
Rated cooling current	: 8.0 A
Rated heating current	: 8.0 A
Indoor noise level High	: 40 dB(A)
Indoor fan type	: Cross Flow
Outdoor fan type	: Propeller fan



**PACKING DETAILS**

Net Weight (Indoor Unit)	: 10 KG
Net Weight (Outdoor Unit)	: 40 KG
Gross Weight (Indoor Unit)	: 13 KG
Gross Weight (Outdoor Unit)	: 45 KG

Packaging Dimension (Indoor Unit)	: 980 × 370 × 278 MM
Packaging Dimension (Outdoor Unit)	: 860 × 585 × 355 MM
Loading Capacity 40hq	: 230



6 2 9 1 1 0 1 6 9 4 6 1 6



**SPECIFICATION**

Type	: Inverter
Capacity	: 1 Ton
BTU	: 12000
Refrigerant	: R410A
Rated Volt & Frequency	: 220-240V/50Hz
Rated Input-Cooling	: 1060(220~1400)W
Indoor air circulation	: 550 m3/h
Rated cooling current	: 4.9(1.0~6.4) A
Indoor fan type	: Cross Flow
Outdoor fan type	: Propeller fan



**PACKING DETAILS**

Net Weight (Indoor Unit)	: 8 KG
Net Weight (Outdoor Unit)	: 22 KG
Gross Weight (Indoor Unit)	: 11 KG
Gross Weight (Outdoor Unit)	: 26 KG

Packaging Dimension (Indoor Unit)	: 840 × 316 × 260 MM
Packaging Dimension (Outdoor Unit)	: 820 × 535 × 325 MM
Loading Capacity 40hq	: 310



6 2 9 1 1 0 1 6 9 4 5 9 3



**SPECIFICATION**

Air Volume	:	(H)1080 m <sup>3</sup> /h, (M)996 m <sup>3</sup> /h, (L)870 m <sup>3</sup> /h
Power	:	(H)200W ,(M)180, (L)150W
Rated Volt & Frequency	:	220-240V/50Hz
Air Speed	:	16 m/s
Noise	:	≤ 44 dB(A)
Unit Size	:	900 x 230 x 220 MM

**PACKING DETAILS**

Net Weight	:	13.5 KG
Gross Weight	:	15.00 KG
Product Dimension	:	900 x 230 x 220 MM
Packaging Dimension	:	960 x 290 x 280 MM
Loading Capacity 40hq	:	115



**SPECIFICATION**

Air Volume	:	(H)1450 m <sup>3</sup> /h, (M)1337 m <sup>3</sup> /h, (L)1168 m <sup>3</sup> /h
Power	:	(H)250W ,(M)225, (L)185W
Rated Volt & Frequency	:	220-240V/50Hz
Air Speed	:	16 m/s
Noise	:	≤ 45 dB(A)
Unit Size	:	1200 x 230 x 220 MM

**PACKING DETAILS**

Net Weight	:	15.5 KG
Gross Weight	:	17.5 KG
Product Dimension	:	1200 x 230 x 220 MM
Packaging Dimension	:	1260 x 290 x 280MM
Loading Capacity 40hq	:	272





**NAC1505**

Nobel

AIR CURTAINS

**SPECIFICATION**

Air Volume	: (H)1800 m <sup>3</sup> /h, (M)1600 m <sup>3</sup> /h, (L)1398 m <sup>3</sup> /h
Power	: (H)325W, (M)290, (L)240W
Rated Volt & Frequency	: 220-240V/50Hz
Air Speed	: 16 m/s
Noise	: ≤ 48 dB(A)
Unit Size	: 1500 x 230 x 220 MM

**PACKING DETAILS**

Net Weight	: 20.5 KG
Gross Weight	: 23.00 KG
Product Dimension	: 1500 x 230 x 220 MM
Packaging Dimension	: 1560 x 290 x 280 MM



**NSAC18T**

Nobel

**SPECIFICATION**

Type	: Cooling
Capacity	: 1.5 Ton
BTU	: 18000
Refrigerant	: R410A
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Consumption	: 2029W
Compressor	: Rotary
Material	: Hydrophilic Fin Material
Noise Level	: 46dB(A)
Air Flow	: 1200m <sup>3</sup> /h



**46 dB(A)**  
Noise Level



**1200 m<sup>3</sup>/h (Hi)**  
Air Flow Volume



**Rotary**  
Compressor



**Refrigerant**



**220-240V**



**PACKING DETAILS**

Net Weight	: 14 KG
Gross Weight	: 16 KG
Product Dimension	: 1025 x 320 x 235 MM
Packaging Dimension	: 1105 x 315 x 405 MM
Loading Capacity 40hq	: 198

SPLIT AC



**NSAC24T**

Nobel

**SPECIFICATION**

Type	: Cooling
BTU	: 24000
Refrigerant	: R410A
Rated Volt & Frequency	: 220-240V/50Hz
Max. Input Consumption	: 2705W
Compressor	: Rotary
Material	: Hydrophilic Fin Material
Noise Level	: 46dB(A)
Air Flow	: 1200m <sup>3</sup> /h



**46 dB(A)**  
Noise Level



**1200 m<sup>3</sup>/h (Hi)**  
Air Flow Volume



**Rotary**  
Compressor



**Refrigerant**



**220-240V**



**PACKING DETAILS**

Net Weight	: 14 KG
Gross Weight	: 16 KG
Product Dimension	: 1025 x 320 x 235 MM
Packaging Dimension	: 1105 x 315 x 405 MM
Loading Capacity 40hq	: 145

**SPECIFICATION**

Type	: Cool
Capacity	: 1.0 Ton
BTU	: 12000
Refrigerant	: R410a
Climatic Condition	: T3
Rated Volt & Frequency	: 220-240V/50Hz
Fan Type	: Centrifugal Fan Assembly
Compressor Capacity	: 2260-2280
Max. Input Constumption	: 1500W
Max. Current	: 17



**NPAC12C**

- Refrigerant
- Wide Oscillation
- Water Tank
- Handle
- Ultra Portable
- Rapid Humidifier

**PACKING DETAILS**

Net Weight	: 31.7 KG
Gross Weight	: 36.5 KG
Packaging Dimension	: 520 x 885 x 465 MM
Loading Capacity 40hq	: 338



**SPECIFICATION**

Type	: Cool
Capacity	: 0.75 Ton
BTU	: 9000 Btu
Refrigerant	: R410a
Climatic Condition	: T1, Cooling Only
Rated Volt & Frequency	: 220-240V/50Hz
Compressor	: Rotary
Rated Input-Cooling/	
Display Type	: LED
Rated Current	: 1015 W / 6.3 A
Air Circulation	: 350 m3/h



**NPAC9000**

- Refrigerant
- Wide Oscillation
- Water Tank
- Handle
- Ultra Portable
- Rapid Humidifier

**PACKING DETAILS**

Net Weight	: 25 KG
Gross Weight	: 27 KG
Product Dimension	: 360 x 370 x 750 MM
Packaging Dimension	: 400 x 538 x 880 MM
Loading Capacity	
20//40'HC	: 126/375

